CATALOG OF

PRODUCTS



Martins®
TINTAS

martinstint
tintins
(19) 3665-5378
www.martinstintas.com.br

INDEX

ADDITIONAL INFORMATION

Field Demarcation 1

Wall Primer 2

Primer Base 3

Anti-aging Gel 4

Reflective Gel and Reflective Gel Plus 5

Liquibrilho 6

MARTINSPREN Waterproofing for Slabs 10 in 1 7

MARTINSPREN 10-in-1 Wall Waterproofing 8

Acrylic Paste 9

Leveling Compound 10

PVA putty 11

Microcoating 12

Acrylic Waterproofing Resin for Roof Tiles 13

Acrylic Sealer 14

Chalk and Chalk Plus Paint 15

Acrylic Waterproofing Varnish 16

2. ACRYLIC PAINTS

Acrylic Refinement Liquid Rubber 17

Standard Performance Acrylic 18

Premium Acrylic Latex Flooring and Facades 19

Inove Acrylic Latex Floor Paint 20

Professional Latex 21

Acrylic Latex 22

Super Economical Latex 23

Premium Sovereign Acrylic 24

Sovereign Premium Semi-Gloss Acrylic 25

Water-based nail polish 26

3. TEXTURES

Burnt Cement 27

Bromate Texture and Noble Bromate with Gloss # 16 20 25 31 28

Textura Grafimartins, Grafimartins Shine e Grafimartins Shine Plus #10 12 14 20 29

Granfino and Granfino Ultra textures #16 20 25 31 30

Smooth Texture 31

Textured Design 32

Rustic or Designer Texture 33

Topaz Texture 34

Zafira Nobre and Zafira Nobre Plus texture #25 35

4. NATURAL STONES

CRYSTAL LINE NATURAL STONES 36

VARIATIONS 37

CRYSTAL BLACK TEXTURE 38

CRYSTAL WHITE TEXTURE 39

5. Solvent Line

STANDARD SYNTHETIC ENAMEL 40

SYNTHETIC ENAMEL DIRECT APPLICATION TO RUST 41

INDUSTRIAL/AUTOMOTIVE SYNTHETIC ENAMEL 42

SOLVENTS 43

RED LEAD 44

MULTIPURPOSE ACRYLIC RESIN 45

SOLVENT-BASED ROAD MARKING 46

ADDITIONAL INFORMATION



FIELD DEMARCATION

EXCELLENT FINISH

HIGH RESISTANCE

EASY APPLICATION

WATER BASED

Colors: White

Feature: Water-based field marking paint.

Surfaces: Grass

Application: Wool or microfiber roller brush.

Finish: Matte.

Dilution: Ready to use

Coats: 2 to 3 coats.

Drying time: final 5 hours

.

Warranty: 2 years from the date of manufacture.

Available Packaging: 18L Can

See more information about this product at:

https://www.martinstintas.com.br/produto/demarcacao-para-campo/

ADDITIONAL INFORMATION



WALL PREPARATION PRIMER

EXTERIOR AND INTERIOR

LOW ODOR

WATER BASED

Promotes ink adhesion.

Colors: Colorless

Characteristic: It is an acrylic complement indicated for uniforming absorption, sealing, increasing the cohesion of porous external and internal surfaces, blocking alkalinity on surfaces such as weak plaster, new concrete, peeling paint, whitewashed walls, and walls in general. Its formulation features a new technology with low odor, providing a pleasant and comfortable application.
Easy penetration into the surface pores, promoting excellent adhesion and performance.

Surfaces: New plaster surfaces should receive an application of Martins Acrylic Sealer to even out absorption, reducing paint consumption and improving the appearance and resistance of the finish. In the case of application on "weak" surfaces – weak plaster, whitewash, paint faded by the sun – apply Martins Wall Primer to strengthen them. Remember that the surface must be firm, cohesive, clean, dry, and free of dust, grease, oil, soap, or mold before any application.

Finish: Colorless.

Dilution: 50% to 100% with potable water.

Coats: 1 coat

Drying time: Touch dry: 60 minutes / Final drying: 4 hours

Yield: Plaster, gypsum, fiber cement, concrete blocks and fine mortar:
Coverage: 150 to 200 m2, 18L per coat.
Coverage: 120 to 140 m2, 16L per coat.
Coverage of 110 to 120 m2, 14L per coat.
Warranty: 2 years from the date of manufacture.

Available Packaging: 16L Barrel / 14L Can / 18L Bucket / 3.6L Gallon / 900ml

See more information about this product at:

https://www.martinstintas.com.br/produto/fundo-preparador-de-paredes/

ADDITIONAL INFORMATION



PRIMER BACKGROUND

EXTERIOR AND INTERIOR

EXCELLENT FINISH

EASY APPLICATION

GREATER ADHESION AND PERFORMANCE

Color: Standard reference color

Feature: Primer is an acrylic complement for interior and exterior walls. Suitable for sealing and even out the absorption of surfaces such as plaster, concrete blocks, exposed concrete, fiber cement, fine mortar, leveling compound, gypsum, and drywall. Used as a primer on unsealed surfaces, it is easy to apply and, due to its high filling power, increases the porosity of the substrate, providing greater adhesion and yield of the finishing product, whether Crystal Texture – Natural Stones or conventional textures. This product is not a finish, only a primer.

Surfaces:
Surfaces should receive an application of Martins Primer (corresponding color) in order to even out absorption, reducing paint consumption and improving the appearance and resistance of the finish. In the case of application on "weak" surfaces such as weak plaster, whitewash, or paint faded by the sun, apply Martins Wall Primer to strengthen them. Remember that the surface must be firm, cohesive, clean, dry, and free of dust, grease, oil, soap, or mold before any application.

Finish
Dark and Rough

Dilution
Up to 20% with potable water.

Coats
1 to 2 coats

Drying
Touch dry: 60 minutes. Between coats: 2 hours. Final drying: 6 hours.

Performance
Plaster, gypsum, fiber cement, concrete blocks and fine mortar
900 ml – 4.5 to 5 m² per coat / liter
3.6 L – 18 to 20 m² per coat/gallon
15 L – 65 to 75 m2 per coat / bucket NOTE: Product yield will depend greatly on the overall condition of the wall and application techniques. Avoid waste.

Validity
2 years from the date of manufacture

Packaging
900 ml, 3.6 l, 15 l.

See more information about this product at:

https://www.martinstintas.com.br/produto/fundo-primer/

ADDITIONAL INFORMATION



AGING GEL

EXTERIOR AND INTERIOR

EXCELLENT FINISH

EASY APPLICATION

READY FOR USE

Cor
White liquid / colorless dry film

Feature:
Aging Gel is a versatile product developed to provide a wide variety of painting effects on interior and exterior masonry walls. Suitable for providing water repellency and creating staining and aging effects on all types of textures: smooth, rustic, textured, brominated, fine-grained, and sprayed. The base is exclusively designed for tinting in any tinting system or water-based dye tubes.

Surfaces:
Preparing the wall (ABNT 13245): Before starting the preparation, the wall must be clean, dry, free of marks or stains of grease or oil, free of mold, free of moisture, and free of loose particles. IN ALL CASES, CAREFULLY READ ALL RECOMMENDATIONS ON THE PACKAGING OF THE PRODUCTS USED, ESPECIALLY THE DRYING TIME BETWEEN COATS.

Finish
The desired color with a slight satin finish.

Dilution
Ready for use

Coats
1 to 2 coats. Note: Depending on the desired finish of the stain.

Drying
Touch dry: 2 hours. Between coats: 4 hours. Final drying: 24 hours.

Income
0.9 liters covers up to 15 m2 per coat.
3.6 liters covers up to 60 m2 per coat.

Validity
2 years from the date of manufacture

Packaging
0.9 liters or 3.6 liters.

See more information about this product at:

https://www.martinstintas.com.br/produto/gel-envelhecedor/

ADDITIONAL INFORMATION



REFLECTIVE GEL AND REFLECTIVE GEL PLUS

EXTERIOR AND INTERIOR

EXCELLENT FINISH

EASY APPLICATION

READY FOR USE

Color: White liquid / colorless dry film

Characteristic: Reflective Gel is a product used to add a shimmering finish to various types of walls, such as: walls already painted with acrylic paint, textured or already painted surfaces, and decorative objects. Its formula contains sparkling crystals that provide points of shine, sophistication, and refinement to environments and decor.
Reflective Gel: Features smaller, shimmering spots.
Reflective Gel Plus: Offers greater shine.

Surfaces
New plaster surfaces should receive an application of Martins Acrylic Sealer to even out absorption, reducing paint consumption and improving the appearance and resistance of the finish. In the case of application on "weak" surfaces – weak plaster, whitewash, paint faded by the sun – apply Martins Wall Primer to strengthen them. Whenever desired or necessary to level surfaces, use Martins PVA Putty (for interior use) or Martins Acrylic Putty (for interior/exterior use). Remember that the surface must be firm, cohesive, clean, dry, and free of dust, grease, oil, soap, or mold before any application.

Application
Paintbrush, wool roller, or paintbrush.

Finish
Light satin finish with shimmering highlights.

Dilution
Ready for use

Coats
1 to 2 coats.
Note: Apply more coats if you want to increase the intensity of the shine.

Drying
Touch dry: 2 hours. Between coats: 6 hours. Final drying: 72 hours.

Packaging
0.9 liters or 3.6 liters.

Income
0.9 liters covers up to 6 m2 per coat.
3.6 liters covers up to 24 m2 per coat.

Validity
2 years from the date of manufacture.

See more information about this product at:

https://www.martinstintas.com.br/produto/gel-refletivo-e-gel-refletivo-plus/

ADDITIONAL INFORMATION



LIQUIBRILHO

EXTERIOR AND INTERIOR

EXCELLENT FINISH

EASY APPLICATION

READY FOR USE

Cor
White liquid / colorless dry film

Feature: LiquiBrilho is a product that, when mixed with latex paint in the final coat, provides a satin to semi-gloss finish, making it more washable and durable. Suitable for adjusting the gloss of acrylic latex paints on interior and exterior walls.

Surfaces
Preparing the wall (ABNT 13245): Before starting the preparation, the wall must be clean, dry, free of marks or stains of grease or oil, free of mold, free of moisture, and free of loose parts.
In all cases, carefully read all the recommendations on the packaging of the products used, especially the drying time between coats.

Finish
The choice of finish depends on the desired sheen.

Dilution
Ready-to-use product

Coats
Used mixed with the paint in the final coat of paint.

Drying
Depending on the type of finish used.

Income
Depending on the type of finish used.

Validity
2 years from the date of manufacture

Packaging
3.6 liters and 18 liters.

See more information about this product at:

https://www.martinstintas.com.br/produto/liquibrilho/

ADDITIONAL INFORMATION



MARTINSPREN WATERPROOFING FOR SLABS 10 IN 1

HIGH RESISTANCE

WATERPROOF

EASY APPLICATION

THERMAL COMFORT

Colors: White (Colored according to customer needs).

Feature:
It is a cold-applied, seamless, ready-to-use liquid membrane made of acrylic, molded on-site. It covers the surface with a protective layer, forming a waterproof membrane, and offers excellent elasticity, flexibility, and adhesion, with great durability and high resistance to weathering. It provides an excellent finish and reflects solar rays, reducing some of the heat absorbed by the structure.

Surfaces:
SLABS: The surface must be previously washed, dried, and free of dust, varnishes, paints, release agents, waxes, fungi, mold, or any type of material that may impair the adhesion of Martins PREN Laje.

Application: Brush, paint roller or bristle broom.

Finish: Matte white.

Dilution: Dilute with up to 10% clean water for the first coat.
For subsequent coats, apply the product undiluted.

Coats:
3 coats to achieve the recommended thickness. Drying time: Touch dry: 4 hours / Between coats: 6 hours / Final: 12 hours.

Performance:
Approximate consumption: 1.2 kg/m² Bucket (18 kg) in exposed areas, with or without polyester mesh. Covers up to 15 m². Approximate consumption: 1.8 kg/m² Bucket (18 kg) in areas with ceramic tile covering. Covers up to 10 m².

Warranty: 2 years from the date of manufacture.

Available Packaging: 16L Bucket (18Kg) / 5.6Kg Gallon.

See more information about this product at:

https://www.martinstintas.com.br/produto/martinspren-impermeabilizante-para-lajes-10-em-1/

ADDITIONAL INFORMATION



MARTINSPREN 10-IN-1 WALL WATERPROOFING

HIGH RESISTANCE

WATERPROOF

EASY APPLICATION

THERMAL COMFORT

Cores:
White

Martins PREN Parede is a waterproof and flexible paint that protects walls and facades against cracks and water infiltration from rain, in addition to having high durability. This multi-action product seals, waterproofs, and finishes walls. It can be applied over plaster, concrete, and fiber cement. This product can be tinted with water-based liquid dye in tinting systems, or painted with acrylic paint. Its elasticity accommodates surface movements, correcting and preventing the appearance of microcracks (openings up to 0.05 mm according to ABNT NBR 9575 standard).

-SURFACE WITH MOLD: To clean the wall, mix clean water and bleach in equal parts, wait at least 6 hours, and rinse the wall thoroughly with plenty of water. Allow to dry.
-SURFACE WITH MOISTURE: Before painting, resolve the lack of waterproofing that is causing the problem. Use waterproofing products suitable for moisture and/or seepage issues.
-GLOSSY SURFACES: Sand until all gloss is removed, and wipe away dust with a damp cloth. Allow to dry. -Surfaces with acrylic filler: Wait at least 1 day for the acrylic filler to dry before applying Martins PREN Wall. Sand until the surface is even, and wipe away dust with a damp cloth. Allow to dry.
-SURFACES WITH OILS, GREASES OR FATS: For surfaces with grease, oils and fats, wash the entire area with soap and water, completely removing the oiliness. Rinse well and let it dry completely.
Application: Martins PREN Wall is applied like paint. Using a high-pile roller or brush, apply 2 to 3 coats, strictly respecting the consumption per m² and the 4-hour intervals between each coat, at a temperature of 25°C. Depending on the type and condition of the wall, more coats may be necessary. Only in the first coat should Martins PREN Wall be diluted by a maximum of 20% with clean water, providing better penetration into the substrate. After waterproofing is complete, wait at least 72 hours for the product to dry, depending on the temperature, ventilation, and relative humidity of the location.

FINISH
White

DILUTION
Before diluting the paint, mix the product well using a plastic, metal, or wooden spatula, or preferably a mechanical mixer. Then dilute with water as shown in the illustrations below.
Dilute with up to 20% clean water for the first coat.
Dilute by 10% or apply the undiluted product for subsequent coats.

DRYING
Touch dry: 1 hour.
Between coats: 4 hours.
Final drying time: 24 hours.

INCOME
Bucket (18 kg) covers up to 180 m2/coat.
Gallon (3.6 kg) covers up to 36 m²/coat.
One liter (0.9 kg) covers up to 9 m² per coat.
(May vary depending on the application and absorption of the surface).

PACKAGING

Liter: 0.900 kg Gallon: 3.6 kg Bucket: 18 kg

See more information about this product at:

https://www.martinstintas.com.br/produto/martinspren-impermeabilizante-para-paredes-10-em-1/

ADDITIONAL INFORMATION



ACRYLIC PUTTY

SMOOTH WALL

SUPER RESISTANT

HIGH FILLING POWER

EASY TO APPLY AND SAND

Colors: White

Characteristic: Suitable for leveling and correcting shallow imperfections on internal and external surfaces of plaster, gypsum, fine mortar, fiber cement, concrete, concrete block, and walls painted with PVA or acrylic latex, providing a smooth finish. It is an easy-to-apply and sand product, dries quickly, and has great filling power as well as good adhesion.

Surfaces: New plaster surfaces should receive an application of Martins Acrylic Sealer to even out absorption, reducing paint consumption and improving the appearance and resistance of the finish. In the case of application on "weak" surfaces – weak plaster, whitewash, paint faded by the sun – apply Martins Wall Primer to make them firm. Whenever desired or necessary to level the surface, use Martins PVA Putty (for interior use) or Martins Acrylic Putty (for interior/exterior use). Remember that the surface must be firm, cohesive, clean, dry, and free of dust, grease, oil, soap, or mold before any application.

Application: Use a steel trowel or spatula. Apply in thin layers until the desired leveling is achieved.
Finish: Matte.

Dilution: Ready to use.

Coats: 1 to 2 coats.

Drying time: Touch dry: 40 minutes / Between coats: 1 hour / Final: 4 hours.
Yield: Plaster, gypsum, fiber cement, concrete blocks and fine mortar:
From 17 to 20m2 22Kg.
From 20 to 30m2, 23kg.
From 23 to 33m2, weighs 27Kg.

Available Packaging: 23kg drum / 22kg 14L can / 22kg 16L bucket / 5.6kg gallon / 900ml.

See more information about this product at:

https://www.martinstintas.com.br/produto/massa-acrilica/

ADDITIONAL INFORMATION



LEVELING COMPOUND

FILLING POWER

GOOD ADHESION

DRIES QUICKLY

EASY TO APPLY

Colors: Natural and Colored.

Characteristic: Suitable for leveling and correcting shallow imperfections on interior surfaces of plaster, gypsum, fine mortar, fiber cement, concrete, concrete block, and walls painted with PVA or acrylic latex, providing a smooth finish. It is an easy-to-apply product, dries quickly, and has great filling power as well as good adhesion.

Surfaces: New plaster surfaces should receive an application of Martins Acrylic Sealer to even out absorption, reducing paint consumption and improving the appearance and resistance of the finish. In the case of application on "weak" surfaces – weak plaster, whitewash, paint faded by the sun – apply Martins Wall Primer to make them firm. Whenever desired or necessary to level the surface, use Martins Leveling Compound. Remember that the surface must be firm, cohesive, clean, dry, free of dust, grease, oil, soap or mold before applying.
any application.

Application: To apply to the wall: Steel trowel or spatula.
For the effect: Plastic trowel, spatulas or effect roller.

Finish: Matte.

Dilution: Ready to use, if the professional wishes, dilute up to 3% with potable water.

Coats: 1 coat.

Drying time: Touch dry: 4 hours / Final: 16 hours / Full cure: 4 days.

Yield: Plaster, gypsum, fiber cement, concrete blocks and fine mortar: 10 to 15m2 23kg.

Available Packaging: 23kg drum / 22kg 14L can / 22kg 14L bucket / 5.6kg gallon / 900ml.

See more information about this product at:

https://www.martinstintas.com.br/produto/niveladora/

ADDITIONAL INFORMATION



PVA PASTE

FILLING POWER

PERFECT WALL

VERY SOFT

LONGER HANDLING TIME

Cores: Natural

Characteristic: Suitable for leveling and correcting shallow imperfections on interior surfaces of plaster, gypsum, fine mortar, fiber cement, concrete, concrete block, and walls painted with PVA or acrylic latex, providing a smooth finish. It is an easy-to-apply and sand product, dries quickly, and has great filling power as well as good adhesion.

Surfaces: New plaster surfaces should receive an application of Martins Acrylic Sealer to even out absorption, reducing paint consumption and improving the appearance and resistance of the finish. In the case of application on "weak" surfaces – weak plaster, whitewash, paint faded by the sun – apply Martins Wall Primer to make them firm. Whenever desired or necessary to level the surface, use Martins PVA Putty (for interior use) or Martins Acrylic Putty (for interior/exterior use). Remember that the surface must be firm, cohesive, clean, dry, and free of dust, grease, oil, soap, or mold before any application.

Application: Use a steel trowel or spatula. Apply in thin layers until the desired leveling is achieved.

Finish: Matte.

Dilution: Ready to use.

If applying with an airless sprayer, dilute up to 20% with clean water.
With an airless sprayer, use a nozzle with an opening of 0.023" to 0.027", a pressure of 2500 to 2900 PSI, and an application speed of 7 to 9 m²/minute.

Coats: 2 to 3 coats.

Drying
Touch dry: 40 minutes. Between coats: 4 hours. Final drying: 24 hours.

Performance:
Unsealed plaster and drywall surfaces: 0.55 kg to 0.65 kg/coat.

Available Packaging: 23kg Barrel / 14L Can / 22kg Bucket / 16L Gallon / 5.6kg Gallon / 900ml

See more information about this product at:

https://www.martinstintas.com.br/produto/massa-pva/

ADDITIONAL INFORMATION



MICRO-COVERING

EXTERIOR AND INTERIOR

HIGH COVERAGE

HIGH RESISTANCE

WATER REPELLENCY

Colors: White and Multicolored (as per customer's needs).

Feature: Micro-coating is a matte finish paint with excellent resistance, water repellency, and coverage that helps you keep your home looking new for much longer. Micro-coating paint is a superior quality product, suitable for exterior and interior use on textured finishes, rustic textures, granfinno texture, and lamato. Its micro-particle composition allows it to paint without losing the rough characteristic of the textured finish.

Surfaces: Walls with applied textured coatings, whether new or faded and/or stained. Remember that the surface must be firm, cohesive, clean, dry, and free of dust, grease, oil, soap, or mold before any application.

Application
Brush, wool roller, paintbrush and spray gun.
NOTE: SHAKE WELL BEFORE AND DURING APPLICATION.

Finish: Matte.

Dilution: Dilute 10% to 20% with clean water.

Coats: 1 coat.

Drying time: Touch dry: 1 hour / Final drying: 72 hours.

Yield: 18L covers up to 80 m2 per coat.
16L for 60 to 70 m2.

Warranty: 2 years from the date of manufacture.

Available Packaging: 16L Barrel / 18L Can / 3.6L Gallon

See more information about this product at:

https://www.martinstintas.com.br/produto/micro-revestimento/

ADDITIONAL INFORMATION



ACRYLIC WATERPROOFING RESIN FOR ROOF TILES.

- GLOSSY FINISH
- WATERPROOFING
- PROTECTION AND DURABILITY
- EASY TO APPLY

Colors: Line

Feature: Acrylic Waterproofing Resin is a glossy finish product that
It provides protection and durability, as well as excellent waterproofing action. It is water-based, offering low odor and ease of application. Suitable for protecting and beautifying interior and exterior areas, on surfaces of tiles (ceramic, asbestos, among others), exposed bricks, natural stones (slate, Minas Gerais stone, among others), exposed concrete, fiber cement, and textured and painted walls with PVA and acrylic paints.

Surfaces:
According to ABNT NBR 13245 standard, the surface must be firm, cohesive, clean, dry, free of dust, shine, grease or oil, soap, mold or loose particles.

Application: Brush, wool roller, paintbrush and spray gun.
.
Finish: Glossy.

Dilution: Brush and wool roller: 10% with clean water for all coats.
Spray gun: 20% with clean water in all coats.

Coats: 2 to 3 coats.

Drying time: Touch dry: 1 hour / Between coats: 4 hours / Final: 24 hours.

Yield: 3.6L covers 40 m2 per coat.
18L covers up to 200m2 per coat.

Warranty: 2 years from the date of manufacture.

Available Packaging: 18L Can / 3.6L Gallon / 900ml

See more information about this product at:

https://www.martinstintas.com.br/produto/resina-para-telha/



ADDITIONAL INFORMATION



ACRYLIC SEALER

- BETTER PAINT ADHESION
- MAKES APPLYING FILLERS EASIER.
- PROMOTES INK SAVINGS.
- SEALS AND UNIFIES THE PLASTER

Colors: White and Multicolored (as per customer's needs).

Feature: It is an acrylic complement for interior and exterior plaster walls. Recommended for
To seal and even out the absorption of new interior surfaces of plaster, concrete blocks, exposed concrete, fiber cement, and fine mortar. Used as a first coat on unsealed surfaces, it is easy to apply and, due to its high filling power, reduces the porosity of the substrate, providing greater yield of the finishing product.

Surfaces: New plaster surfaces should receive an application of Martins Acrylic Sealer in order to
To even out absorption, reducing paint consumption and improving the appearance and durability of the finish. In the case of application on "weak" surfaces such as weak plaster, whitewash, or paint damaged by the sun, apply Martins Wall Primer to strengthen them. Remember that the surface must be firm, cohesive, clean, dry, and free of dust, grease, oil, soap, or mold before any application.

Application: Wool roller, brush or paintbrush.

Finish: Matte.

Dilution: Up to 20% with potable water.

Coats: 1 coat.

Drying time: Touch dry: 60 minutes / Between coats: 2 hours / Final: 4 hours.

Coverage: 18L bucket covers up to 120m2 per coat. 16L drum covers 80 to 100m2 per coat.
14L can, covering 70 to 90m2 per coat.

Warranty: 2 years from the date of manufacture.

Available Packaging: 16L Barrel / 14L Can / 18L Bucket / 3.6L Gallon / 900ml.

See more information about this product at:

https://www.martinstintas.com.br/produto/selador/

ADDITIONAL INFORMATION



CHALK PAINT AND CHALK PLUS

INTERIORS

HIGH ADHESION POWER

EASY TO APPLY

MATTE AND UNIFORM FINISH

Colors: White

Feature: It is suitable for interior application directly on plaster and plasterboard.
Suitable for common or drywall surfaces. Can be used as a primer, allowing for the application of PVA or acrylic latex paint. Its formulation features a technology that makes it suitable for various types of plaster with high adhesion power. A matte, uniform finish paint that acts as a fixative for loose particles.

Surfaces: New plaster surfaces should receive an application of Martins Acrylic Sealer in order to
To even out absorption, reducing paint consumption and improving the appearance and durability of the finish. In the case of application on "weak" surfaces such as weak plaster, whitewash, or paint damaged by the sun, apply Martins Wall Primer to strengthen them. Whenever desired or necessary to level the surface, use Martins PVA Putty (for interior use) or Martins Acrylic Putty (for interior/exterior use). Remember that the surface must be firm, cohesive, clean, dry, and free of dust, grease, oil, soap, or mold before any application.

Application: Wool or microfiber roller brush.

Finish: Matte.

Dilution: For Plaster/Putty Primer: 30% to 50%.
Plaster, Concrete: 10% to 20% with clean water.

Coats: 2 to 3 coats.

Drying time: Touch dry: 2 hours / Between coats: 4 hours / Final: 12 hours.

Yield: Primer for Plaster/Putty: 100 m2 to 125 m2/18L.
Reboco, Concrete: 120 m2 to 150 m2/18L.

Available Packaging: 18L Can / 3.6L Gallon / 900ml.

See more information about this product at:

https://www.martinstintas.com.br/produto/gesso-e-gesso-plus/

ADDITIONAL INFORMATION



ACRYLIC WATERPROOFING VARNISH

EXTERIOR AND INTERIOR

EASY TO APPLY

WATER BASED

ENHANCE THE NATURAL APPEARANCE

Colors: White Liquid / Film
dry colorless

Feature: Acrylic varnish is a water-based wall product that provides protection, shine, and enhances the appearance of the surface.
Natural look, suitable for application on interior and exterior surfaces of brick, exposed concrete, fiber cement, and walls painted with PVA and acrylic paints, and over textured surfaces.

Surfaces: New plaster surfaces should receive an application of Martins Acrylic Sealer in order to...
To even out absorption, reducing paint consumption and improving the appearance and durability of the finish. In the case of application on "weak" surfaces such as weak plaster, whitewash, or sun-damaged paint, apply Martins Wall Primer to strengthen them. Whenever desired or necessary to level surfaces, use Martins PVA Putty (for interior use) or Martins Acrylic Putty (for interior/exterior use). Remember that the surface must be firm, cohesive, clean, dry, and free of dust, grease, oil, soap, or mold before any application.

Application: Brush, wool roller, paintbrush and spray gun.

Finish: Glossy.

Dilution: Brush and wool roller: 10% with clean water for all coats.

Spray gun: 20% with clean water for all coats.

Coats: 2 to 3 coats.

Drying time: Touch dry: 2 hours
Between coats: 6 hours. Final: 24 hours.

Yield: 3.6 liters covers up to 50 m2 per coat.
18 liters yields up to 200 m² per coat.

Warranty: 1 year from the date of manufacture.

Available Packaging: 3.6 liters and 18 liters.

See more information about this product at:

https://www.martinstintas.com.br/produto/verniz-acrilico/

2. ACRYLIC PAINTS



ACRYLIC REFINEMENT LIQUID RUBBER

EXCELLENT FINISH

PROTECTS AGAINST RAIN.

ELASTIC AND FLEXIBLE


WATERPROOF

Colors: White and Multicolored (as per customer's needs).

Feature: Martins Rubberized Latex is an elastic ink that prevents the reappearance of
This paint seals cracks (fine cracks up to 0.3 mm), preventing them from causing water infiltration from rain, sea spray, dew, or even washing on exterior walls. Its satin finish and high thickness offer unparalleled protection against the growth of mold and algae, and against the effects of sun and other weather conditions. It is a paint especially suitable for exterior areas, on plaster and acrylic filler surfaces.

Surfaces: For new plaster surfaces, allow for complete curing (28 days) before applying a coat of Martins Acrylic Sealer diluted up to 20% with clean water. For application on "weak" surfaces – weak plaster, whitewash, paint faded by the sun – apply Martins Wall Primer diluted 50% to 100% with clean water to strengthen the surface.
Whenever desired or necessary to level the surface, use Martins Acrylic Putty (exterior /
(interior). Remember that the surface must be firm, cohesive, clean, dry, and free of dust, grease, oil, soap, or mold before any application.

Application: Brush, wool roller, paintbrush and spray gun.
Matte finish.
Dilution: Up to 20% with clean water for the first coat. Up to 10% with clean water for subsequent coats.
Coats: 3 coats.
Drying time: Touch dry: 2 hours. Between coats: 4 hours. Final: 12 hours.
Income:
A 3.6 liter gallon yields up to 15m² of finished product.
An 18-liter can covers up to 75m² when finished.
Warranty: 2 years from the date of manufacture.
Available Packaging: 18L Can / 3.6L Gallon / 900ml.

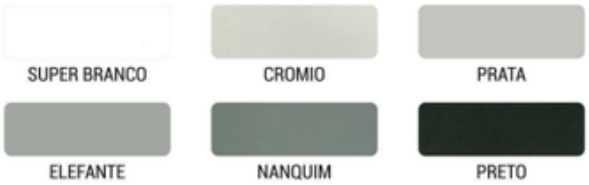

See more information about this product at:

https://www.martinstintas.com.br/produto/requinte-borracha-liquida/

2. ACRYLIC PAINTS

STANDARD PERFORMANCE ACRYLIC

SUPER CONCENTRATED

ODORLESS

HIGH PERFORMANCE

HIGH COVERAGE



Colors: White and Multicolored (as per customer's needs).

Characteristic: Standard Acrylic Latex is a matte paint that is easy to apply, offers excellent coverage and quick drying, has a low odor, and provides a very fine, velvety matte finish, bringing refinement and sophistication to environments. Suitable for interior and exterior painting of plaster, acrylic fillers, textures, concrete, fiber cement, and interior surfaces with properly prepared fillers.

Surfaces: New plaster surfaces should receive an application of Martins Acrylic Sealer to even out absorption, reducing paint consumption and improving the appearance and resistance of the finish. In the case of application on "weak" surfaces – weak plaster, whitewash, paint faded by the sun – apply Martins Wall Primer to make them firm. Whenever desired or necessary to level the surface, use Martins PVA Putty (for interior use) or Martins Acrylic Putty (for interior/exterior use). Remember that the surface must be firm, cohesive, clean, dry, and free of dust, grease, oil, soap, or mold before any application.

Application: Brush, wool roller, paintbrush and spray gun.

Finish: Matte.

Dilution: It can be diluted 50% to 80% with potable water.

Coats: 2 to 3 coats.

Drying:
Touch dry: 30 minutes. Between coats: 4 hours. Final drying: 12 hours.



FINISHED YIELD:

An 18-liter can yields up to 170 m² of finished area.
- **A 3.6-liter gallon yields up to 33 m² of finished area.**
- **A 3.2-liter gallon covers up to 30 m² of finished material.**

(May vary depending on the dilution used, the type and condition of the surface to be painted, and the color used).

Warranty: 2 years from the date of manufacture.

Available Packaging: 18L Can / 3.6L Gallon / 900ml.

See more information about this product at:

https://www.martinstintas.com.br/produto/acrilico-standard-performance/

2. ACRYLIC PAINTS

ACRYLIC LATEX FLOORING AND FACADES

HIGH DURABILITY

LOW ODOR

HIGH PERFORMANCE

EXTERIOR AND INTERIOR



Colors: Colorful Line

Martins Floors and Facades is indicated for painting and repainting cement floors in parking lots, garages, sports courts, balconies, sidewalks and other areas of rustic concrete and matte and porous ceramic flooring, as well as exterior and interior walls and facades. These surfaces will always be protected against sun, rain, sea air, and wear caused by foot traffic. Furthermore, it offers good coverage, excellent yield, and easy application. Martins Floors and Facades incorporates high-tech resins in its formulation, making it more resistant and allowing for greater spreading. All these attributes make the product an excellent and economical option for beautifying and renovating floors and facades.

Application
Roller brush made of wool or microfiber.
DILUTION
Before diluting the paint, mix the product well using a plastic, metal, or wooden spatula. You can also use a whisk. Then dilute with water as shown in the illustrations below.
IF USING, a wool roller, brush or paintbrush!
First coat: dilute 30% with clean water.
For the second coat, dilute 20% with clean water if using an airless spray gun!
Dilute 30% to 40% with clean water.
LAYERS
Typically, 2 or 3 coats will give you excellent results. However, depending on the type and condition of the wall, and the color, you may need more coats.

DRYING
Touch dry: 1 hour after application.
Between coats: 4 hours after application.
Final drying time: 12 hours.
Movement of people: 48 hours. Movement of vehicles: 72 hours.
Income
COLORS – An 18-liter can yields up to 120 m² of finished product.
WHITE – An 18-liter can covers up to 70 m² when finished.
COLORS – A 3.6-liter gallon covers up to 24 m² when finished.
WHITE – A 3.6-liter gallon covers up to 14 m² of finished material.
Product Warranty
Product with a warranty of up to 2 (two) years from the date of manufacture. Warranty is conditional upon proper surface preparation for receiving the product, combined with correct application. The warranty also requires maintenance every 2 (two) years, which must be carried out by applying new paint.
Remember that all paint/coatings require maintenance as they wear down due to weathering.
(Note: In intense colors, fading may occur in a shorter period, depending on the weathering the surface undergoes. Remember that in areas with heavy traffic or constant wetting, wear is much greater, requiring maintenance before 2 (two) years.)
Packaging
3.6 liters, 18 liters.



See more information about this product at:

https://www.martinstintas.com.br/produto/acrilico-pisos-e-fachadas/

2. ACRYLIC PAINTS

ACRYLIC LATEX INNOVATE FLOOR PAINT

GOOD DURABILITY

LOW ODOR

GOOD PERFORMANCE

EXTERIOR AND INTERIOR



Product: Inove Floor Paint (all colors)
Floor paint is an exterior and interior floor coating. Suitable for painting cement floors and matte and porous ceramic floors, both in exterior and interior areas, such as leisure areas, stairs, balconies, sports courts, and other rough or smooth concrete surfaces, or for repainting. It is an easy-to-apply product, dries quickly, allowing for good coverage and adhesion, good spreading, good resistance to sea air, and a satin finish. All these qualities make it a great, economical way to renovate, beautify, and protect floors.

Surfaces
Surfaces of rough, smooth concrete or porous, matte ceramic tiles must be clean and dry, free of any impurities such as oils, grease, dust, and moisture. In the case of polished cement, wash with a solution of 1 liter of muriatic acid in 2 liters of water and let it act for 30 minutes, then rinse well and let it dry. If the surface is soiled with oils and grease, wash with soap and water, rinse well, and let it dry. When repainting, scrape off any loose parts, wash to remove all dust, and apply Inove Floor Paint.

Application
Roller brush made of wool or microfiber.

Finish
Matte

Dilution
New and burnt cement: 10% with clean water in all coats.
New, weak, or unburned cement: 30% with clean water for the first coat and 10% for subsequent coats.


Coats
2 to 3 coats.

Drying
Touch dry: 2 hours. Between coats: 4 hours.

Income
COLORS – A 16-liter bucket yields up to 106 m² of finished material.
WHITE – A 16-liter bucket covers up to 62 m² of finished material.
COLORS – A 3.6-liter gallon covers up to 24 m² when finished.
WHITE – A 3.6-liter gallon covers up to 14 m² of finished material.

Warranty: 2 years from the date of manufacture.

Available Packaging: 16L Bucket / 3.6L Gallon

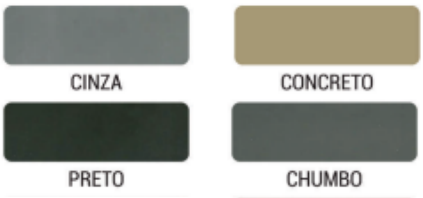

See more information about this product at:

https://www.martinstintas.com.br/produto/inove-tinta-para-piso/

2. ACRYLIC PAINTS

PROFESSIONAL LATEX

INTERNAL SURFACES

LOW ODOR

HIGH COVERAGE

HIGH PERFORMANCE



Colors: White and Colorful (Light Line Colors)

Feature: Economical Professional Latex is an interior paint for those who want economy without sacrificing quality. With a matte finish, easy application, excellent coverage, quick drying, low odor and good yield, it provides a very fine velvety finish, bringing refinement and sophistication to interior spaces.



Surfaces: New plaster surfaces should receive an application of Martins Acrylic Sealer in order to
To even out absorption, reducing paint consumption and improving the appearance and durability of the finish. In the case of application on "weak" surfaces such as weak plaster, whitewash, or paint damaged by the sun, apply Martins Wall Primer to strengthen them. Whenever desired or necessary to level the surface, use Martins PVA Putty (for interior use) or Martins Acrylic Putty (for interior/exterior use). Remember that the surface must be firm, cohesive, clean, dry, and free of dust, grease, oil, soap, or mold before any application.

See more information about this product at:

https://www.martinstintas.com.br/produto/latex-profissional/

Application: Brush, wool roller, paintbrush and spray gun.

Finish: Matte.

Dilution: Up to 20% with clean water for all coats.

Coats: 2 to 3 coats.

Drying time: Touch dry: 2 hours / Between coats: 3 hours / Final: 12 hours.

Yield: 3.6L covers 45 to 55 m2 per coat.
18L covers up to 225m2 per coat.
900ml covers up to 10m2 per coat.

Warranty: 2 years from the date of manufacture.

Available Packaging: 18L Bucket / 3.6L Gallon / 900ml.

2. ACRYLIC PAINTS

ACRYLIC LATEX

INTERNAL SURFACES

LOW ODOR

HIGH COVERAGE

HIGH PERFORMANCE



Colors: White and Colorful (Light Line Colors)

Characteristic: Acrylic Latex is an easy-to-apply paint with excellent coverage and yield, quick drying, low odor, providing a very fine velvety matte finish, bringing refinement and sophistication to environments. Suitable for painting interior surfaces, plaster, acrylic filler, PVA filler, fiber cement, concrete, textures and gypsum.

Surfaces: New plaster surfaces should receive an application of Martins Acrylic Sealer in order to
To even out absorption, reducing paint consumption and improving the appearance and durability of the finish. In the case of application on "weak" surfaces such as weak plaster, whitewash, or paint damaged by the sun, apply Martins Wall Primer to strengthen them. Whenever desired or necessary to level the surface, use Martins PVA Putty (for interior use) or Martins Acrylic Putty (for interior/exterior use). Remember that the surface must be firm, cohesive, clean, dry, and free of dust, grease, oil, soap, or mold before any application.



See more information about this product at:

https://www.martinstintas.com.br/produto/latex-acrilico/

Application: Brush, wool roller, paintbrush and spray gun.

Finish: Matte.

Dilution: 20% to 30% with clean water for all coats.

Coats: 2 to 3 coats.

Drying time: Touch dry: 1 hour / Between coats: 4 hours / Final: 12 hours.

Income:
Liter (900 ml) covers 8 to 15 m²; Gallon (3.6 l) covers 40 to 60 m²; Can (18 l) covers 200 to 300 m²

Warranty: 2 years from the date of manufacture.

Available Packaging: 18L Bucket / 3.6L Gallon / 900ml.

2. ACRYLIC PAINTS

SUPER ECONOMICAL LATEX

INTERNAL SURFACES

LOW ODOR

HIGH COVERAGE

HIGH PERFORMANCE



Colors: White and Colorful (Light Line Colors)

Characteristic: Acrylic Latex is an easy-to-apply paint with excellent coverage and yield, quick drying, low odor, providing a very fine velvety matte finish, bringing refinement and sophistication to environments. Suitable for painting interior surfaces, plaster, acrylic filler, PVA filler, fiber cement, concrete, textures and gypsum.

Surfaces: New plaster surfaces should receive an application of Martins Acrylic Sealer in order to
To even out absorption, reducing paint consumption and improving the appearance and durability of the finish. In the case of application on "weak" surfaces such as weak plaster, whitewash, or paint damaged by the sun, apply Martins Wall Primer to strengthen them. Whenever desired or necessary to level the surface, use Martins PVA Putty (for interior use) or Martins Acrylic Putty (for interior/exterior use). Remember that the surface must be firm, cohesive, clean, dry, and free of dust, grease, oil, soap, or mold before any application.



See more information about this product at:

https://www.martinstintas.com.br/produto/latex-super-economico/

Application: Brush, wool roller, paintbrush and spray gun.

Finish: Matte.

Dilution: Up to 20% with clean water for all coats.

Coats: 2 to 3 coats.

Drying time: Touch dry: 2 hours / Between coats: 3 hours / Final: 12 hours.

Income:
0.900 ml covers up to 6m2 per coat.
3.6 liters covers up to 22m2 per coat.
16 liters covers up to 100m2 per coat.
18 liters yields up to 112m2 per coat.

Warranty: 2 years from the date of manufacture.

Available Packaging: 18L Bucket / 3.6L Gallon / 900ml.

2. ACRYLIC PAINTS



SOVEREIGN PREMIUM ACRYLIC

- EXCELLENT FINISH
- LOW ODOR
- HIGH COVERAGE
- HIGH DURABILITY

Colors: White and Multicolored (as per customer's needs).

Feature: Premium Acrylic Latex is a matte paint that is easy to apply, has excellent coverage and...
Quick-drying, low-odor, and provides a very fine, velvety matte finish, bringing refinement and sophistication to environments. Suitable for interior and exterior painting of plaster, acrylic fillers, textures, concrete, fiber cement, and interior surfaces with properly prepared fillers.

Surfaces: New plaster surfaces should receive an application of Martins Acrylic Sealer to even out absorption, reducing paint consumption and improving the appearance and resistance of the finish. In the case of application on "weak" surfaces – weak plaster, whitewash, paint faded by the sun – apply Martins Wall Primer to make them firm. Whenever desired or necessary to level the surface, use Martins PVA Putty (for interior use) or Martins Acrylic Putty (for interior/exterior use). Remember that the surface must be firm, cohesive, clean, dry, and free of dust, grease, oil, soap, or mold before any application.

Application: Brush, wool roller, paintbrush and spray gun.

Finish: Matte.
Dilution: Dilute 10 to 20% with clean water.
Coats: 2 to 3 coats.
Drying time: Touch dry: 1 hour / Between coats: 4 hours / Final: 12 hours.

FINISHED YIELD:
An 18-liter can yields up to 130 m² of finished area.
A 16-liter can yields up to 116 m² of finished area.
A 3.6-liter gallon yields up to 26 m² of finished material.
A 3.2-liter gallon covers up to 23 m² of finished material.
(May vary depending on the dilution used, the type and condition of the surface to be painted, and the color used).

Warranty: 2 years from the date of manufacture.

Available Packaging: 18L Can / 3.6L Gallon



See more information about this product at:

https://www.martinstintas.com.br/produto/acrilico-soberano-premium/

2. ACRYLIC PAINTS



SOVEREIGN PREMIUM SEMI-GLOSS ACRYLIC

EXCELLENT FINISH

LOW ODOR

HIGH COVERAGE

HIGH DURABILITY

Colors: White and Multicolored



Feature: Product: Semi-Gloss Latex (all colors)
This paint is easy to apply, offers excellent coverage and yield, dries quickly, has a low odor, and provides a very fine, non-glossy finish, bringing refinement and sophistication to environments and handcrafted pieces. Suitable for painting exterior and interior surfaces, including plaster, acrylic filler, PVA filler, fiber cement, concrete, wood, MDF, textured surfaces, and gypsum.

Surfaces: New plaster surfaces should receive an application of Martins Acrylic Sealer, while wood and MDF surfaces should receive an application of MDF Paint to even out absorption, reducing paint consumption and improving the appearance and resistance of the finish. In the case of application on "weak" surfaces (weak plaster, whitewash, sun-damaged paint), apply Martins Wall Primer to make them firmer. Whenever desired or necessary to level the surface, use Martins PVA Putty (for interior use) or Martins Acrylic Putty (for interior/exterior use). Remember that the surface must be firm, cohesive, clean, dry, and dust-free.
Remove any grease, oil, soap, or mold before any application.

Application: Brush, wool roller, paintbrush and spray gun.
Finish: Semi-gloss.
Dilution: Dilute 10 to 20% with clean water.
Coats: 2 to 3 coats.
Drying time: Touch dry: 1 hour / Between coats: 4 hours / Final: 12 hours

Performance:
An 18-liter can covers up to 90 m² when finished.
A 16-liter can yields up to 80 m² of finished product.

A 3.6-liter gallon yields up to 18 m² of finished material.
A 3.2-liter gallon covers up to 16 m² of finished material.

Warranty: 2 years from the date of manufacture.

Available Packaging: 18L Can / 3.6L Gallon

See more information about this product at:

https://www.martinstintas.com.br/produto/produto-acrilico-soberano-premium-semi-brilho/

2. ACRYLIC PAINTS



WATER-BASED NAIL POLISH

- Super Resistant
- High Coverage
- White
  It doesn't yellow.
- Odorless

Product: Water-based nail polish
This paint is easy to apply, offers excellent coverage and yield, dries quickly, has a low odor, and provides a very fine, glossy finish, bringing refinement and sophistication to environments and handcrafted pieces. Suitable for painting exterior and interior surfaces of wood, ferrous materials, galvanized steel, aluminum, and PVC.

Application: Brush, foam roller, paintbrush and spray gun.

Surfaces: Wood, ferrous metals, galvanized steel, aluminum, and PVC.

Finish: Glossy

Tools: Paintbrush, Soft paintbrush, Foam roller
• RECOMMENDED DILUTION: WATER
• 10% to 20% in all coats.

Tool: Spray gun with a spray pressure of 30 to 35 lb/in²
• RECOMMENDED DILUTION: WATER
• 20% to 30% in all coats.

RECOMMENDED BASE: Leveling Base

Coats: 2 to 3 coats.

Drying time: Touch dry: 30 to 45 minutes; Between coats: 2 to 3 hours; Final drying: 24 hours

Income
Can (18 L): up to 325 m² Gallon (3.6 L): up to 65 m² Liter (0.9 L): up to 16 m²

Shelf life: 2 years from the date of manufacture.



See more information about this product at:

https://www.martinstintas.com.br/produto/esmalte-base-agua/

3. TEXTURES



BURNED CEMENT

EXTERIORS AND INTERIORS

SUPER RESISTANT

EASY TO APPLY

MATTE FINISH

Colors: As per customer's needs.

Characteristic: It is a smooth coating that allows you to achieve the realistic effect of polished cement, with very easy application, high yield and excellent performance, bringing sophistication and refinement to the environment. Suitable for exterior and interior areas. Available in two ready-made colors and can also be tinted in any color using tintometric systems.

Surfaces: New plaster surfaces should receive an application of Martins Acrylic Sealer or Martins White Acrylic Latex as a primer in the Burnished Cement Effect color, in order to aid adhesion, even out absorption, and for better performance of the effect. In the case of application on "weak" surfaces (weak plaster, whitewash, sun-damaged paint), apply Martins Wall Primer to firm it up and then apply a coat of Martins Acrylic Latex in the Burnished Cement Effect color. Whenever desired or necessary to level the surface, use Martins PVA Putty (for interior use) or Martins Acrylic Putty (for exterior/interior use). Remember that the surface must be firm, cohesive, clean, dry, and free of dust, grease, oil, soap, or mold before any application.

Application: Stainless steel trowel with rounded corners and stainless steel spatula.

Finish: Matte.

Dilution: Ready to use.


Coats: Three coats (layers) will achieve an excellent effect; apply a fourth coat (layer) if necessary.

Drying time: Touch dry: 1 hour. / Between coats: 2 hours / Final: 24 hours. / Full cure: 30 days.

Yield: Plaster, gypsum, fiber cement, concrete blocks and fine mortar: 25 to 35 m2 25kg/coat (layer)
6.5 to 9 m2 5.6 kg/coat (layer)

Warranty: 3 years for the product and 1 year for color (fading). We also have this product with a 5-year warranty; the price is different and requires a separate quote.

Available Packaging: 23kg Barrel / 22kg Can / 23kg Bucket / 5.6kg Gallon / 1.4kg Gallon

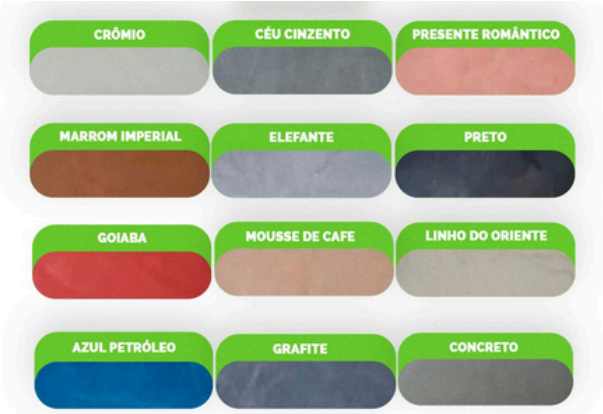


See more information about this product at:

https://www.martinstintas.com.br/produto/cimento-queimado/

3. TEXTURES



BROMATE AND NOBLE BROMATE TEXTURE WITH GLOSS #16 20 25 30

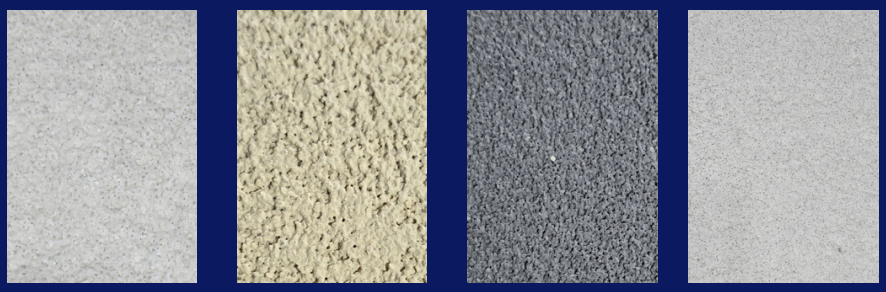

Colors: Natural and Colored (as per customer's needs).

Characteristic: Textures that create rustic effects with small points of shine. Suitable for texturing exterior surfaces and For interior plastering, acrylic filler, and repainting over PVA or acrylic latex paint. Its water-repellent characteristic provides greater durability to the coating by preventing moisture penetration. Its formulation includes components that give the wall a sophisticated and modern finish, enhancing the texture and water repellency, eliminating the need for a finishing paint. Easy application, good adhesion, and excellent homogeneity.

Surfaces: New plaster surfaces should receive an application of Martins Acrylic Sealer to even out absorption, reducing paint consumption and improving the appearance and resistance of the finish. In the case of application on "weak" surfaces – weak plaster, whitewash, paint faded by the sun – apply Martins Wall Primer to make them firm. Whenever desired or necessary to level the surface, use Martins PVA Putty (for interior use) or Martins Acrylic Putty (for interior/exterior use). Remember that the surface must be firm, cohesive, clean, dry, and free of dust, grease, oil, soap, or mold before any application.

Application: For loading the wall: Steel trowel and/or spatula.
For this purpose: Use a plastic trowel and/or spatulas.
To clean: Bucket with clean water and a soft-bristled brush.
Washing Instructions: After 4 days, use a high-pressure washer, opening the spray pattern and maintaining a distance of 50cm to 60cm from the wall to avoid damaging the coating. Wait for it to dry and the shine will appear.

Finish: Matte.
Dilution: Ready to use, but if the professional wishes to dilute it, up to 3% is permitted with potable water.

Coats: 1 coat. Note: For very uneven surfaces, 2 coats are needed to correct the problem.
NOTE: If the wall has unevenness, we recommend 2 coats.

Drying time: Touch dry: 6 hours / Final drying: 16 hours / Wash to enhance shine: 4 days.

Yield: Suitable for plaster, gypsum, fiber cement, concrete blocks and fine mortar, repainting and sealed surfaces.
Bromate Texture #16: can render between 5 to 6 m2 23Kg.
Bromate Texture #20: can render between 5 to 7 m2 23Kg.
Bromate Texture #25: can render between 6 to 8 m2 23Kg.
Bromate Texture #30: can render between 6 to 8 m2 23Kg.

Warranty: 3 years for the product and 1 year for color (fading). We also have this product with a 5-year warranty, price varies. Separate quote.

Available Packaging: 23kg Barrel / 14L Can / 23kg Bucket / 16L Gallon / 5.6kg Gallon / 900ml


See more information about this product at:

https://www.martinstintas.com.br/produto/textura-bromato-e-bromato-nobre-com-brilho-20-25-30/

3. TEXTURES



TEXTURA GRAFIMARTINS, GRAFIMARTINS SHINE E GRAFIMARTINS SHINE PLUS #10 12 14 20

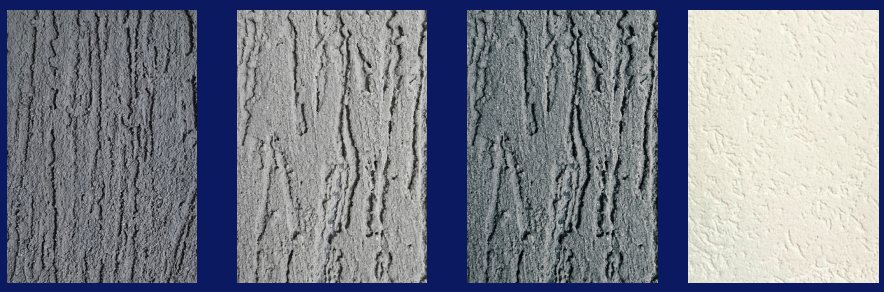

Colors: Natural and Colored (as per customer's needs).

Characteristic: Texture with larger grains that create rustic effects of grooves (scratches) and differentiated designs. Suitable for texturing internal and external surfaces of plaster, concrete blocks, exposed concrete, acrylic or putty, fiber cement, repainting over PVA or acrylic. Its water-repellent characteristic provides greater durability to the paint, by preventing moisture penetration. Its formulation contains components that give the wall a special scratched finish, enhancing the texture and water repellency, eliminating the need for a finishing paint. Easy application, good adhesion and excellent homogeneity. What differentiates Grafiato Shine and Grafiato Shine Plus from Grafiato is the use of mica particles with shine.

Surfaces: New plaster surfaces should receive an application of Martins Acrylic Sealer to even out absorption, reducing paint consumption and improving the appearance and resistance of the finish. In the case of application on "weak" surfaces – weak plaster, whitewash, paint faded by the sun – apply Martins Wall Primer to make them firm. Whenever desired or necessary to level the surface, use Martins PVA Putty (for interior use) or Martins Acrylic Putty (for interior/exterior use). Remember that the surface must be firm, cohesive, clean, dry, and free of dust, grease, oil, soap, or mold before any application.

Application: To apply to the wall: Steel trowel or spatula.
For scoring: Use a plastic or wooden trowel.

Finish: Matte.

Dilution: Ready to use, if the professional wishes to dilute, up to 3% is permitted with potable water.

Coats: 1 coat.

Drying time: Touch dry: 4 hours / Final drying: 16 hours / Full cure: 4 days.

Yield: Suitable for plaster, gypsum, fiber cement, concrete blocks and fine mortar, repainting and sealed surfaces.
Textura Grafimartins #10: pode render entre 4 à 6 m2 23Kg.
Textura Grafimartins #12: pode render entre 5 à 7 m2 23Kg.
Textura Grafimartins #14: pode render entre 5 à 7 m2 23Kg.
Textura Grafimartins #20: pode render entre 6 à 8 m2 23Kg.

Warranty: 3 years for the product and 1 year for color (fading). We also have this product with a 5-year warranty, price [price missing].
Different with separate quotation.

Available Packaging: 23kg Barrel / 14L Can / 23kg Bucket / 16L Gallon / 5.6kg / 900ml.

See more information about this product at:

https://www.martinstintas.com.br/produto/textura-grafiato-grafiato-shine-e-grafiato-shine-plus-10-12-1/

3. TEXTURES



GRANFINO AND GRANFINO ULTRA TEXTURE # 16 20 25 30



Colors: Natural and Colored (as per customer's needs).

Characteristic: Textures that create rustic effects and distinctive designs. Suitable for texturing interior and exterior surfaces of plaster, concrete blocks, exposed concrete, acrylic or putty, fiber cement, repainting over PVA or acrylic. Its water-repellent characteristic provides greater durability to the paint by preventing moisture penetration. Its formulation includes components that give the wall a special scratched finish, enhancing the texture and water repellency, eliminating the need for a finishing paint. Easy application, good adhesion and excellent homogeneity.

Surfaces: New plaster surfaces should receive an application of Martins Acrylic Sealer to even out absorption, reducing paint consumption and improving the appearance and resistance of the finish. In the case of application on "weak" surfaces – weak plaster, whitewash, paint faded by the sun – apply Martins Wall Primer to make them firm. Whenever desired or necessary to level the surface, use Martins PVA Putty (for interior use) or Martins Acrylic Putty (for interior/exterior use). Remember that the surface must be firm, cohesive, clean, dry, and free of dust, grease, oil, soap, or mold before any application.

Application: To apply to the wall: Steel trowel or spatula.
For the desired effect: Use a plastic trowel, spatulas, or a roller.

Finish: Matte.

Dilution: Ready to use, but if the professional wishes to dilute it, up to 3% is permitted with potable water.

Coats: 1 coat. Note: For very uneven surfaces, 2 coats are needed to correct the problem.
NOTE: If the wall has unevenness, we recommend 2 coats.

Drying time: Touch dry: 4 hours / Final: 16 hours / Full cure: 4 days.

Suitable for: Plaster, gypsum, fiber cement, concrete blocks and fine mortar.
Plaster, gypsum, fiber cement, concrete blocks, and fine mortar.
Granfinno Texture #16: can cover between 5 and 6 m2, 23Kg.
Granfinno Texture #20: can cover between 5 and 7 m2, 23 kg.
Granfinno Texture #25: can cover between 7 and 9 m2, 23 kg.
Granfinno Texture #30: can cover between 7 and 9 m2, 23 kg.

Warranty: 3 years for the product and 1 year for color (fading). We also have this product with a 5-year warranty.
years, different price with separate quote.

Available Packaging: 23kg Barrel / 23kg 14L Can / 23kg 14L Bucket / 5.6kg Gallon / 900ml Gallon.

See more information about this product at:

https://www.martinstintas.com.br/produto/textura-granfino-e-granfino-ultra-20-25-30/

3. TEXTURES



SMOOTH TEXTURE



Product: Smooth Texture

Textures that create smooth effects and distinctive designs. Suitable for texturing exterior and interior surfaces of plaster, concrete blocks, exposed concrete, acrylic or putty, fiber cement, and repainting over PVA or acrylic. Its water-repellent characteristic provides greater durability to the paint. Its formulation includes components that give the wall a special finish, enhancing the texture. When the texture is NATURAL, after 3 days of application, a coat of paint is needed for finishing. Easy application, good adhesion and excellent homogeneity.

Surfaces: New plaster surfaces should receive an application of Martins Acrylic Sealer to even out absorption, reducing paint consumption and improving the appearance and resistance of the finish. In the case of application on "weak" surfaces – weak plaster, whitewash, paint faded by the sun – apply Martins Wall Primer to make them firm. Whenever desired or necessary to level the surface, use Martins PVA Putty (for interior use) or Martins Acrylic Putty (for interior/exterior use). Remember that the surface must be firm, cohesive, clean, dry, and free of dust, grease, oil, soap, or mold before any application.

Application: For applying to the wall: Use a trowel, steel spatula, or roller.

For this purpose: Trowel, appropriate rollers and brushes.

Finish: Matte.

Dilution: Ready to use, if the professional wishes to dilute, up to 3% is permitted with potable water.

Coats
1 to 2 coats.

Drying
Between coats: 6 to 8 hours. Final drying time: 72 hours. Total cure: 30 days.

Performance
Plaster, gypsum, fiber cement, concrete blocks and fine mortar: 9 to 11 m2 23 kg. Repainting and sealed surfaces: 9 to 11 m2 23 kg.

Packaging
Bucket/Barrel 23 kg

See more information about this product at:

https://www.martinstintas.com.br/produto/textura-lisa/

3. TEXTURES



PROJECTED TEXTURE



Colors: Natural and Colored (as per customer's needs).

Characteristic: Textured coating suitable for interior and exterior surfaces, applied with high-pressure spray guns, providing various decorative designs, excellent finish, quick drying, resistance to weathering and fungi, water-repellent properties, and high yield and coverage.

Surfaces: New plaster surfaces should receive an application of Martins Acrylic Sealer to even out absorption, reducing paint consumption and improving the appearance and resistance of the finish. In the case of application on "weak" surfaces – weak plaster, whitewash, paint faded by the sun – apply Martins Wall Primer to make them firm. Whenever desired or necessary to level the surface, use Martins PVA Putty (for interior use) or Martins Acrylic Putty (for interior/exterior use). Remember that the surface must be firm, cohesive, clean, dry, and free of dust, grease, oil, soap, or mold before any application.

Application: To apply to the wall: Steel trowel or spatula.
For the desired effect: Use a plastic trowel, spatulas, or a roller.

Finish: Matte.

Dilution: Ready to use, if the professional wishes to dilute, up to 3% is permitted with potable water.

Coats: 1 coat. Note: For very uneven surfaces, 2 coats are needed to correct the problem.
NOTE: If the wall has unevenness, we recommend 2 coats.

Drying time: Touch dry: 4 hours / Final: 16 hours / Full cure: 30 days.

Yield: Plaster, gypsum, fiber cement, concrete blocks and fine mortar: 8 to 12 m²/23 kg
Repainting and sealed surfaces: 9 to 12 m2/23 kg.

Available Packaging: 23kg Barrel / 14L Can / 23kg Bucket / 16L Gallon / 5.6kg Gallon / 900ml

See more information about this product at:

https://www.martinstintas.com.br/produto/textura-projetada/

3. TEXTURES



RUSTIC OR DESIGNER TEXTURE



Colors: Natural and Colored (as per customer's needs).

Characteristic: Textures that create rustic effects and distinctive designs. Suitable for texturing interior and exterior surfaces of plaster, concrete blocks, exposed concrete, acrylic or putty, fiber cement, repainting over PVA or acrylic. Its water-repellent characteristic provides greater durability to the paint by preventing moisture penetration. Its formulations contain components that give the wall special finishes, enhancing the texture and water repellency, eliminating the need for a topcoat. Easy application, good adhesion and excellent homogeneity.

Surfaces: New plaster surfaces should receive an application of Martins Acrylic Sealer to even out absorption, reducing paint consumption and improving the appearance and resistance of the finish. In the case of application on "weak" surfaces – weak plaster, whitewash, paint faded by the sun – apply Martins Wall Primer to make them firm. Whenever desired or necessary to level the surface, use Martins PVA Putty (for interior use) or Martins Acrylic Putty (for interior/exterior use). Remember that the surface must be firm, cohesive, clean, dry, and free of dust, grease, oil, soap, or mold before any application.

Application: To apply to the wall: Steel trowel or spatula.
For the desired effect: Use a plastic trowel, spatulas, or a roller.

Finish: Matte.

Dilution: Ready to use, if the professional wishes to dilute, up to 3% is permitted with potable water.

Coats: 1 coat.

Drying time: Touch dry: 4 hours / Final: 16 hours / Full cure: 4 days.

Rendimento: 7 a 10 m2 23Kg.

Available Packaging: 23kg Barrel / 14L Can / 23kg Bucket / 16L Bucket / 5.6kg Gallon / 900ml.


See more information about this product at:

https://www.martinstintas.com.br/produto/textura-rustica-ou-designer/

3. TEXTURES



TOPAZ TEXTURE



Colors: Natural and Colored (as per customer's needs).

Characteristic: Textures that create brilliant effects. Suitable for texturing exterior and interior surfaces of plaster, putty, acrylic putty, fiber cement, repainting over latex, PVA or acrylic. Its water-repellent and ultra-resistant characteristic provides greater durability to the coating by preventing moisture penetration. Its formulation includes high-tech components and special stones and larger glitter particles that allow for intense shine with the need for washing, making surfaces more protected and application faster.

Surfaces: New plaster surfaces should receive an application of Martins Acrylic Sealer (in the correct color) to even out absorption, reducing texture consumption and improving the appearance and resistance of the finish. In the case of application on "weak" surfaces – weak plaster, whitewash, paint faded by the sun – apply Martins Wall Primer to strengthen them. Whenever desired or necessary to level the surface, use Martins PVA Putty (for interior use) or Martins Acrylic Putty (for interior/exterior use). Remember that the surface must be firm, cohesive, clean, dry, and free of dust, grease, oil, soap, or mold before any application.

Application: To apply to the wall: Steel trowel or spatula.

For this purpose: Plastic trowel, spatulas.

Finish: Glossy, rustic with flakes or shimmer.

Dilution: Ready to use, but if the professional wishes to dilute it, up to 3% with potable water.

Coats: One coat is sufficient; depending on the unevenness of the wall, a second coat may be necessary.
for a better finish.

Drying time: Touch dry: 6 hours / Final: 72 hours / Full cure: 30 days.

Yield: Plaster, gypsum, PVA filler, acrylic filler, fiber cement, and fine mortar: 5 to 7 m2 23 Kg.

Available Packaging: 23kg Barrel / 14L Can / 23kg Bucket / 16L Gallon / 5.6kg Gallon / 900ml.


See more information about this product at:

https://www.martinstintas.com.br/produto/textura-topazio-p20-40-60/

3. TEXTURES



ZAFIRA NOBLE TEXTURE AND ZAFIRA NOBLE PLUS #25



Colors: Natural and Colored (as per customer's needs).

Characteristic: Textures that create brilliant effects. Suitable for texturizing exterior and interior surfaces of plaster, putty, acrylic putty, fiber cement, and repainting over PVA or acrylic latex. Its water-repellent and ultra-resistant properties provide greater durability to the coating by preventing moisture penetration. Its formulation includes high-tech components and special stones that allow for intense shine without the need for washing, making surfaces more protected and application faster.

Surfaces: New plaster surfaces should receive an application of Martins Acrylic Sealer (in the correct color) to even out absorption, reducing texture consumption and improving the appearance and resistance of the finish. In the case of application on "weak" surfaces – weak plaster, whitewash, paint faded by the sun – apply Martins Wall Primer to strengthen them. Whenever desired or necessary to level the surface, use Martins PVA Putty (for interior use) or Martins Acrylic Putty (for interior/exterior use). Remember that the surface must be firm, cohesive, clean, dry, and free of dust, grease, oil, soap, or mold before any application.

Application: To apply to the wall: Steel trowel or spatula.
For this purpose: Plastic trowel, spatulas.
Finish: Glossy, rustic with shimmering accents.

Dilution: Ready to use.
If necessary, add up to 3% with potable water.

Coats: One coat is sufficient; depending on the unevenness of the wall, a second coat may be necessary.
for a better finish.

Drying time: Touch dry: 6 hours / Final: 72 hours / Full cure: 30 days.

Yield: Plaster, gypsum, PVA filler, acrylic filler, fiber cement, and final coat: 5 to 8 m2 / 23 Kg.

Available Packaging: 23kg Barrel / 14L Can / 23kg Bucket / 16L Gallon / 5.6kg Gallon / 900ml Gallon.

See more information about this product at:

https://www.martinstintas.com.br/produto/textura-zafira-nobre-e-zafira-nobre-plus-25/

4. NATURAL STONES



CRYSTAL LINE NATURAL STONES

EXTERIOR AND INTERIOR

BEAUTY AND SOPHISTICATION

EASY APPLICATION

EXCELLENT FINISH

MARTINS TINTAS presents its CRYSTAL line, a natural stone texture that arrives on the market adding refinement and sophistication to a classic style with a more noble and cozy look. Art is a fundamental tool for transformation. The versatility of this product offers 12 extraordinary combinations, and this revolution of elegance and nobility makes environments unforgettable. The timeless and contemporary contrast results in a harmonious space, without being dated by fads or trends.

The minerals provide a unique, flawless finish, their characteristics noticeable at a glance. This texture was designed to express moments of well-being and fulfillment. The natural stones that make up the product are highly resistant, and this stability is maintained with their original characteristics for longer.

The application is done only with a stainless steel trowel to avoid oxidation (rust) and possible contamination during application. Because this product is made from natural raw materials, we recommend that you do not mix different batches in the same area, as there is a high chance of color variations.

Water-repellent texture for indoor/outdoor use. We recommend using a primer in a color that matches the texture.

Touch dry in 4 hours.

FINAL DRYING TIME: 72 HOURS

COMPLETE CURING TIME: 120 DAYS (WHITEN WITH WATER)

• TOOLS: STAINLESS STEEL TROWEL AND SPATULA

PERFORMANCE
Bucket or Barrel of Natural Stones (22kg) - 4 to 5m²; Bucket or Barrel of Primer (15L) - up to 75m². Proportion: For every 15 buckets or barrels of natural stones (22kg each), use 1 bucket of primer (15L). Gallon of natural stones (5.6kg) - 1 to 1.3m²; Gallon of primer (3.6L) - up to 18m².

NOTE - This product takes 120 days to fully cure due to contact with water (whitening).
If the client wishes to avoid this, a colorless, solvent-based resin can be applied at least 4 days after the Crystal application.

See more information about this product at:

https://www.martinstintas.com.br/produto/linha-crystal-pedras-naturais/

4. NATURAL STONES




CRYSTAL MOSCOW



CRYSTAL PARIS



CRYSTAL LONDRES

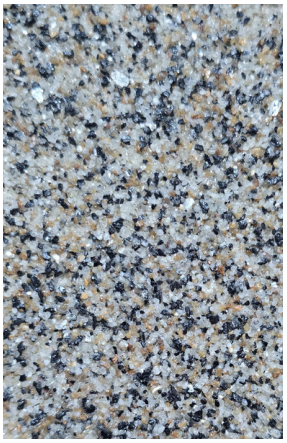

CRYSTAL AMSTERDÂ



CRYSTAL LISBON



CRYSTAL PRAGUE



CRYSTAL ROMA



CRYSTAL ATHENS



CRYSTAL BERLIN



CRYSTAL
MOTHERS



CRYSTAL BRUSSELS



CRYSTAL VIENA

The number 1 in texture and decorative effects with the best cost-benefit ratio in Brazil!

4. NATURAL STONES



CRYSTAL BLACK TEXTURE

EXTERIOR AND INTERIOR

BEAUTY AND SOPHISTICATION

EASY APPLICATION

EXCELLENT FINISH

Product: CRYSTAL BLACK TEXTURE
Textures that create brilliant effects. Suitable for texturizing exterior and interior surfaces of plaster, putty, acrylic putty, fiber cement, and repainting over PVA or acrylic latex. Its water-repellent and ultra-resistant characteristics provide greater durability to the coating. Its formulation includes high-tech components and special stones and larger glitter particles that allow for intense shine without the need for washing, making surfaces more protected and application faster. Please note that this product must already be in the desired color.

Finish
Bright, rustic with touches of glitter.

How to apply:
Spread the product on the desired surface using a spatula and a steel trowel, removing any excess, being careful not to remove too much product from the surface. Finish by applying the product with a plastic trowel, using circular motions.
NOTE: For larger surfaces, apply with the help of more professionals, avoiding seams.

Dilution
Ready to use. If necessary, dilute up to 3% with potable water.

Coats
One coat is sufficient, but depending on the unevenness of the wall, a second coat may be necessary for a better finish.

Drying
Touch dry: 6 hours. Final cure: 72 hours. Full cure: 30 days.

Packaging: 22 kg.

Performance
Plaster, gypsum, PVA filler, acrylic filler, fiber cement, and fine mortar. 6.5 to 8.5 m²/23 kg

See more information about this product at:

https://www.martinstintas.com.br/produto/textura-crystal-black/

4. NATURAL STONES



CRYSTAL WHITE TEXTURE

EXTERIOR AND INTERIOR

BEAUTY AND SOPHISTICATION

EASY APPLICATION

EXCELLENT FINISH

Product: Crystal White Texture
Textures that create brilliant effects. Suitable for texturizing exterior and interior surfaces of plaster, putty, acrylic putty, fiber cement, and repainting over PVA or acrylic latex. Its water-repellent and ultra-resistant characteristics provide greater durability to the coating. Its formulation includes high-tech components and special stones and larger glitter particles that allow for intense shine without the need for washing, making surfaces more protected and application faster. Remember that this product must already be in the desired color.

Finish
Bright, rustic with touches of glitter.

How to apply:
Spread the product on the desired surface using a spatula and a steel trowel, removing any excess, being careful not to remove too much product from the surface. Finish by applying the product with a plastic trowel, using circular motions.
NOTE: For larger surfaces, apply with the help of more professionals, avoiding seams.

Dilution
Ready to use. If necessary, dilute up to 3% with potable water.

Coats
One coat is sufficient, but depending on the unevenness of the wall, a second coat may be necessary for a better finish.

Drying
Touch dry: 6 hours. Final cure: 72 hours. Full cure: 30 days.

Packaging: 22 kg.

Performance
Plaster, gypsum, PVA filler, acrylic filler, fiber cement, and fine mortar. 6.5 to 8.5 m²/23 kg

See more information about this product at:

https://www.martinstintas.com.br/produto/textura-crystal-white/

5. Solvent Line



STANDARD SYNTHETIC ENAMEL

Quick Drying

Easy Application

High Gloss

Exterior and Interior

STANDARD SYNTHETIC ENAMEL
Martins Gloss Synthetic Enamel is a high-quality, durable product suitable for interior and exterior use. Ideal for painting and repainting surfaces such as:
– Ferrous metals – Galvanized steel – Aluminum – Wood – Masonry – PVC. Forms a film with prolonged protection, preserving shine and a new appearance for much longer. It has fast drying, excellent finish, great coverage and easy application, in addition to offering excellent yield and spreadability.

Recommended Tools
- Brush
Soft brush
Foam roller
- Spray gun (30 to 35 lb/in² pressure)

Dilution
Brush, Paintbrush, Roller:
Recommended Solvent: MARTINS RÁS
– Dilution: 10% to 20% in all coats. Spray gun:
Recommended Solvent: MARTINS RÁS
– Dilution: 20% to 25% in all coats

Drying
Touch dry: 2 hours
– Between coats: 4 to 6 hours
– Final: 10 hours

Finished Yield
– 900 mL → up to 6 m² finished
– 3.6 L → up to 20 m² finished
– 18 L up to 100 m² finished

Number of Coats
2 to 3 coats (But depending on the type, condition of the surface and color, you may need more coats).
Recommended Funds
– Iron and steel: Red Lead Oxide Primer / Anti-rust
– Galvanized: Galvanized Primer (solvent-based)
– Wood: Matte White Leveling Primer for Wood

See more information about this product at:

https://www.martinstintas.com.br/produto/esmalte-sintetico-standard/

5. Solvent Line



Synthetic enamel applied directly to rust.

Martins Direct-to-Rust Synthetic Enamel is an anti-rust enamel that can be applied directly to clean or rusty iron. No primer is needed. It prevents and stops the rusting process. Its formula offers Dual Technology: High Water Repellency and Anti-Corrosive Action, and allows dilution with conventional turpentine, eliminating the need for dilution with a specific solvent. It has great coverage and yield. Suitable for indoor and outdoor environments.

APPLICATION TOOL:
Large areas: Foam roller or spray gun.
Small areas: Use a brush with soft bristles.

DRYING:
Touch dry: 1 hour.
Between coats: 4 to 6 hours.
Final drying time: 24 hours, depending on ambient temperature, humidity, and air circulation. (Drying times between coats and final drying may vary depending on the layer applied, substrate, and suitable weather conditions).

COATS:
2 to 3 for brush or paintbrush
4. For wool or foam roller and spray gun. IMPORTANT: Surface protection depends on the thickness of the Direct Rust Enamel applied. Always apply the correct number of coats according to the tool used.

COVERAGE PER COAT:
18-liter can: Up to 180 m² per coat. 3.6-liter gallon: Up to 36 m² per coat.
0.900 liter can: Up to 9 m² per coat.
Depending on the application conditions and the type/condition of the surface.

DILUTION:
Thoroughly mix the product with a plastic, metal, or wooden spatula shaped like a ruler, before, during dilution, and application.
Brush or paintbrush: Ready to use.
Wool or foam roller: 5 to 10% with Thinner D.M 2800. Spray gun:
Reduce the volume by 15% to 20% with Thinner D.M. 2800.

See more information about this product at:

https://www.martinstintas.com.br/produto/esmalte-sintetico-direto-na-ferrugem/

5. Solvent Line



AUTOMOTIVE/INDUSTRIAL SYNTHETIC ENAMEL

Secagem Ultra Rápida

Excelente Cobertura

Super Proteção

Maior Resistência

AUTOMOTIVE/INDUSTRIAL SYNTHETIC ENAMEL

INDUSTRIAL/AUTOMOTIVE SYNTHETIC ENAMEL IS A HIGH-QUALITY ENAMEL WITH EXCELLENT COVERAGE, HIGH GLOSS, AND YIELD. IT HAS HIGH WEATHER RESISTANCE AND DURABILITY, PROVIDING EFFECTIVE PROTECTION FOR AGRICULTURAL VEHICLES, TRUCKS, TRACTORS, AND MACHINERY. IT CAN ALSO BE USED ON METAL APPLIANCES SUCH AS STOVES, REFRIGERATORS, AND WASHING MACHINES. THIS ALKYD RESIN-BASED PAINT OFFERS HIGH RESISTANCE, AN EXCELLENT FINISH, AND QUICK DRYING. IT IS SUITABLE FOR GENERAL OR PARTIAL PAINTING OF VEHICLES AND AGRICULTURAL IMPLEMENTS, INDUSTRIAL MACHINERY, WOOD, AND METAL PARTS IN GENERAL.

APPLICATION TOOL:
LARGE AREAS: FOAM ROLLER OR SPRAY GUN.
SMALL AREAS: USE A BRUSH WITH SOFT BRISTLES.

DRYING:
TOUCH DRY: 20 TO 30 MINUTES.
BETWEEN COATS: 20 TO 30 MINUTES.
FOR HANDLING: 4 TO 6 HOURS.
FINAL DRYING TIME: 24 HOURS, DEPENDING ON AMBIENT TEMPERATURE, HUMIDITY, AND AIR CIRCULATION. (DRYING TIMES BETWEEN COATS AND FINAL DRYING MAY VARY DEPENDING ON THE LAYER APPLIED, SUBSTRATE, AND SUITABLE WEATHER CONDITIONS).

COATS:
2 TO 3 COATS.

COVERAGE PER COAT:
18-LITER CAN: UP TO 200 M² PER COAT. 3.6-LITER GALLON: UP TO 40 M² PER COAT.
0.900 LITER CAN: UP TO 10 M² PER COAT.
DEPENDING ON THE APPLICATION CONDITIONS AND THE TYPE/CONDITION OF THE SURFACE.

DILUTION:
THOROUGHLY MIX THE PRODUCT WITH A PLASTIC, METAL, OR WOODEN SPATULA SHAPED LIKE A RULER, BEFORE, DURING DILUTION, AND APPLICATION.
BRUSH, FOAM ROLLER: 5 TO 10% WITH THINNER D.M 2800 SPRAY GUN:
DE 20% A 30% COM THINNER D.M. 2800.

See more information about this product at:

https://www.martinstintas.com.br/produto/esmalte-sintetico-industrial-automotivo/

5. Solvent Line



SOLVENTS

- MARTIN'S CHANNEL
- THINNER D.M. 2800

18L / LATA 5L / 900ML

Martin's Channel
This product is indicated for diluting Martins Standard Synthetic Enamel, a product with total compatibility with our synthetic paints, providing excellent finish and paint durability.

INSTRUCTIONS FOR USE:
This product can be used indoors and outdoors. It can be used for thinning synthetic paints and for cleaning surfaces.
PACKAGING:
Can: 18 liters Gallon: 5 liters Can: 900 ml Composition: Aliphatic Hydrocarbon.
Thinner D.M. 2800
It is a clear, colorless, flammable product with a characteristic odor.
INSTRUCTIONS FOR USE:
Recommended for thinning wood sealer, synthetic automotive paints, nitrocellulose-based paints (duco), and primers.
PACKAGING:
Can: 18 liters Gallon: 5 liters Can: 900 ml Composition: Chemicals: Hydrocarbons, alcohols, esters and ketones. * Free of chlorinated solvents and benzene.

See more information about this product at:

http://www.martinstintas.com.br/categoria-produto/solventes/

5. Solvent Line



RED LEAD

- Prevents Rust
- Easy Application
- Excellent Performance
- Increases the durability of the paint.

PRODUCT DESCRIPTION
To achieve the best painting performance, proper surface preparation is essential. Martins Zarcão primer was developed specifically to prepare and protect metal surfaces before applying the finish.
Its formulation provides excellent adhesion, contributing to greater durability and resistance of the paint system. It has a fast drying time, making it suitable for use in industries, maintenance of machinery, equipment, agricultural implements and metal structures in general.

INDICATIONS FOR USE
Recommended for protection and adhesion promotion on ferrous metal surfaces, in indoor and outdoor environments, before the application of the final finish.

ATTENTION
This product should not be applied to enameled, vitrified, or waxed surfaces.

TECHNICAL INFORMATION
Dilution with turpentine:
Brush or roller: up to 10%
• Spray gun: up to 30% (Recommended pressure: 2.2 to 2.8 kgf/cm² or 30 to 35 psi)

Tools
Spray gun, foam roller, or soft-bristled brush.

Coats
It is recommended to apply one coat.

Drying
• Touch dry: 4 hours
• Handling: 12 hours
• Full cure time: 24 hours (Times may vary depending on environmental conditions and batch.)

Performance
• 3.6L gallon: up to 40 m² per coat
• 18L can: up to 200 m² per coat
• Liter: 900ml covers up to 10 m² per coat

See more information about this product at:

https://www.martinstintas.com.br/produto/zarcao-base-solvente/

5. Solvent Line



MULTIPURPOSE ACRYLIC RESIN

- Quick Drying
- Easy Application
- High Resistance
- High Protection

PRODUCT DESCRIPTION
Martins Solvent-Based Multipurpose Colorless Acrylic Resin was developed to provide superior protection and aesthetic enhancement of surfaces in indoor and outdoor environments. Formulated with advanced waterproofing resin technology, it offers high weather resistance, excellent adhesion, and water-repellent action, preventing the formation of mold, mildew, and stains. It does not whiten when exposed to moisture. Its high-gloss finish intensifies the natural appearance of surfaces, in addition to facilitating cleaning, providing a durable and visually sophisticated final result.

MAIN ATTRIBUTES
• High water and moisture repellency
• Excellent durability and resistance
• Easy application
• Easy cleaning
• For internal and external use
• High waterproofing power

INDICATIONS FOR USE
Suitable for protecting and finishing surfaces such as:
• Ceramic and fiber cement roof tiles
• Exposed bricks
• Natural stones (Slate, Miracema, São Tomé, Mineira, Goiana)
• Exposed concrete
• Porous ceramic surfaces. Restrictions:
• Do not apply to enameled, glazed, or non-porous surfaces.

APPLICATION
• Tools:
the wool roller the brush the paintbrush the spray gun
• Coats: 2 to 3 coats
• Dilution: Product ready for use.

DRYING
• Touch dry: 30 minutes
• Between coats: 4 hours
• Final drying time: 120 hours. Note: drying times may vary depending on weather conditions, application thickness, and substrate type.

Yield (per coat)
• Lata 18L: 100 a 200 m²
• 3.6L gallon: 20 to 40 m²
• 900 ml packaging: 5 to 10 m² Coverage may vary depending on surface porosity, application method, and applicator experience.

See more information about this product at:

https://www.martinstintas.com.br/produto/resina-acrilica-multiuso/

5. Solvent Line



SOLVENT-BASED ROAD MARKING

High Resistance

Quick Drying

High Adhesion

High performance

ROAD DEMARCATION
Solvent-based road marking paint is formulated with high-strength resins, pigments with excellent coverage, and special additives that provide fast drying, high adhesion, and resistance to wear caused by vehicle and pedestrian traffic. Suitable for horizontal road marking on urban roads, highways, parking lots, industrial yards, condominiums, logistics centers, and security areas.

DILUTION
TOOLS: Brush, Soft Paintbrush, Foam Roller. Recommended Solvent: THINNER D.M 2800. Ratio: Up to 10% in all coats.
SPRAY GUN: Spray gun with spraying pressure (30 to 35 lb/in²) Recommended Solvent: THINNER D.M 2800 Proportion: 20% to 30% in all coats.

INDICATIONS FOR USE
Asphalt pavements
Concrete pavements
Parking lots
— Pedestrian crossings
Speed bumps
Bike paths
Industrial yards
— Circulation and safety areas

DRYING
Touch dry: 10 to 15 minutes. Between coats: 20 to 30 minutes. Ready for light traffic: 30 to 60 minutes. Final cure: 24 hours.

PERFORMANCE
18L CAN 0.4 mm layers: 45 to 50 m² 0.6 mm layers: 30 to 35 m²

3.6L Gallon 0.4 mm layer: 9 to 10 m² 0.6 mm layer: 6 to 7 m²

See more information about this product at:

https://www.martinstintas.com.br/produto/demarcacao-viaria-base-solvente/



martinstint
tintins
(19) 3665-5378
www.martinstintas.com.br